

HOGTUNES

Audio Solutions For The Great American Cruiser



HF-1 HOG POD

HIGH PERFORMANCE TWEETER POD

FITS 1998+ FLHT AND FLHX MODEL BIKES

INSTALLATION MANUAL

Congratulations and thank you for your purchase of Hogtunes HF-1 Tweeter Pod. Since positive word of mouth is the best way to grow our business, we want your new speakers to work as well as they were designed to. If you have any questions or concerns, we are here to help. Email or call us during regular business hours. If you still need help, then please consider a professional installation by your dealer.


Hogtunes Contact Information

Email: techsupport@hogtunes.com

USA Tel: 608-554-7631 • Canada Tel: 705-719-6361

TWEETER POD INSTALLATION INSTRUCTIONS

Step #1: Remove the ground wire from the battery, or make sure your ignition switch stays in the "OFF" position. Remove your outer fairing/headlamp assembly, and set it aside. Refer to a service manual if you need help with this.

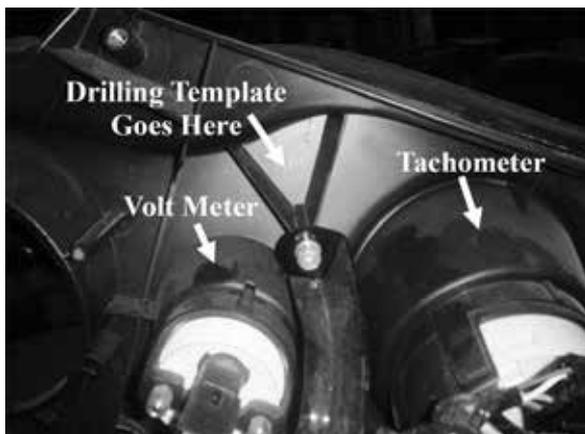

Step #2: NOTE: If you already have a Fairing Dash Pad (HD Part # 58262-05) remove the unit from the bike, and skip to Step #5. Your kit comes with a small triangle shaped "drilling template" with two 1/8" (3mm) holes in it. Please note one side says "clutch side" and the other side says "brake side". There is a "V" formed in the inner fairing plastic where the drilling template fits into. On the brake side of the bike, hold the drilling template "in" this "V" so the words "brake side" are showing. Using a 1/8" (3mm) drill bit, drill the pilot holes, repeat for the clutch side and enlarge all 4 holes to 5/16" (8mm).

Step #3: With the tweeter pod in hand, move to the seat side of the bike, and run the speaker wires through the bottom 5/16" (8mm) holes just drilled.

This kit comes with "see through" grills installed, and a second set covered with grill cloth. To change grills, remove the 2 screws holding the small circuit board in place on the back side of the pod, and straighten up the 4 folded over "legs" Once straight, pushing on each leg will allow the grill to release from the pod. Sit the new grill in place making sure it is fully "seated" and fold the legs over to secure. Re-install the circuit board.

Step #4: Holding the tweeter pod in place, locate the mounting screws with washers and install them through the upper holes, **making sure the tweeter's wires do not get pinched as the pod gets secured to the fairing.** Make them snug, but do not over tighten. **DO NOT USE "SCREW GLUE" OF ANY KIND** as it eats plastic. The supplied mounting hardware and hole size allow room for minor adjustments, so before the part is completely secured into place, make sure it is lined up where you want it. If you are replacing a HD Fairing Dash Pad (HD Part # 58262-05) you need to use their washers which are larger diameter than the supplied washers. You may want to start the bike to check for rattles. If anything is rattling, use the supplied loose piece of foam to "shim" the pod and stop any rattles.

Step #5: Unplug the 2 speaker wires on the brake side front fairing speaker. Using a "Y" cable that came in the kit, plug the 2 larger male connectors of the "Y" jack into the female connectors that were just unplugged at the speaker noting they will only go in one way. The female connectors on the "Y" jack will now plug into the front fairing speakers-again, they will only go on one way. Plug the 2 wires with smaller male spades on the brake side tweeter into the 2 remaining connectors on the "Y" Jack. Repeat for the clutch side.

Step #6: Re-install the battery ground wire, turn your radio on and confirm that both speakers and both tweeters are playing. You can adjust the tweeters sound using the treble control on your radio. Re-install your outer fairing and your new speakers are ready to enjoy!

TECH SPECS

Power Handling	50 RMS / 100 Peak
Frequency Response	3hz-25Khz
Front. Speaker Sensitivity	92 db 1watt/1meter
Nominal Impedance	6 Ohms
Passive Network	5k-3rd Order Butterworth

Suitable for 2-8 ohm Radios or Amplifiers

WARRANTY INFO

Hogtunes speakers are warranted for a period of 20 years to the original purchaser. Proof of purchase is required for all warranty claims. Please contact Hogtunes for all warranty claims. Products found to be defective during the warranty period will be repaired or replaced (with a product deemed to be equivalent) at Hogtunes sole discretion. Hogtunes complete warranty policy is available on our website at www.hogtunes.com/warranty.html

What Is Not Covered:

- 1) Any expense related to the removal or re-installation of these speakers.
- 2) Repairs to these speakers performed by anyone other than Hogtunes Inc.
- 3) Subsequent damage to any other components.
- 4) Any product purchased from a non-authorized Hogtunes dealer.
- 5) Damage to speakers from an accident or collision.
- 6) Damage from incorrect installation, improper use, abuse or modifications.
- 7) Damage to inbound product due to improper packing.

IMPORTANT: In the event of a warranty claim, please fill out the form in the Warranty section of our website, or contact us by email or by phone. Valid claims will have a Return Authorization Number (RA#) generated which MUST appear on the outside of the box when it arrives to our offices.

Goods Arriving Without An RA# Will Be Refused!



Hogtunes products will play much louder than the Original Equipment, which can be a distraction to the rider and/or passenger. Please use caution when adjusting or playing your stereo at high volume, especially in traffic. You are a valued customer so please: **RIDE ALERT / ARRIVE ALIVE!**

HOGTUNES

HOGTUNES INC. FAMILY OF BRANDS

HOGTUNES
Audio Solutions For The Great American Cruiser



www.hogtunes.com